



## KP/BN Air Curtains

The air curtains KP/BN with air outlet slot located closer to gate plane are used to protect against uncontrolled external air inflow through the doors or gates in such facilities as: shopping malls and supermarkets, restaurants, bars, hotels, banks, public service buildings, offices, hospitals, pharmacies, warehouses etc. The units are suitable for taking and heating air from the inside of the premises. They can be used without air heating as "cold" curtains. The curtains are intended for the use at the height of 2÷6m. They may be positioned above gates (horizontal operation position) or at the their sides (vertical operation position). The curtains can be installed next to each other so their length is close to the door width.

The curtains consist of:

- housing made of galvanized sheet (single side painted on RAL9010 colour) with outlet slot along the whole length;
- water heater;
- axial-flow fans (2,3 or 4).

The curtains are offered in two sizes 1 and 2, with four lengths (150, 200, 250, 300cm) in each. In agreement with manufacturer KP/BN air curtains could be made with:


- three-phase motors;
- electric heater;
- painted on other colours.

### Working conditions

The curtains allow for air speed at the floor within the limits of 4÷6m/s. The water heating coils are supplied with water with the temperature of 110°C or lower and the pressure of up to 1,5MPa. In agreement with manufacturer there is Possibility of supply of curtains with water heater with water temperature up to 150°C. There is the possibility of extension of curtains air flow regulation up to 5 steps with the use of additional speed controller of the fans.

## KP/BN-1-150-Z

### DIMENSIONS

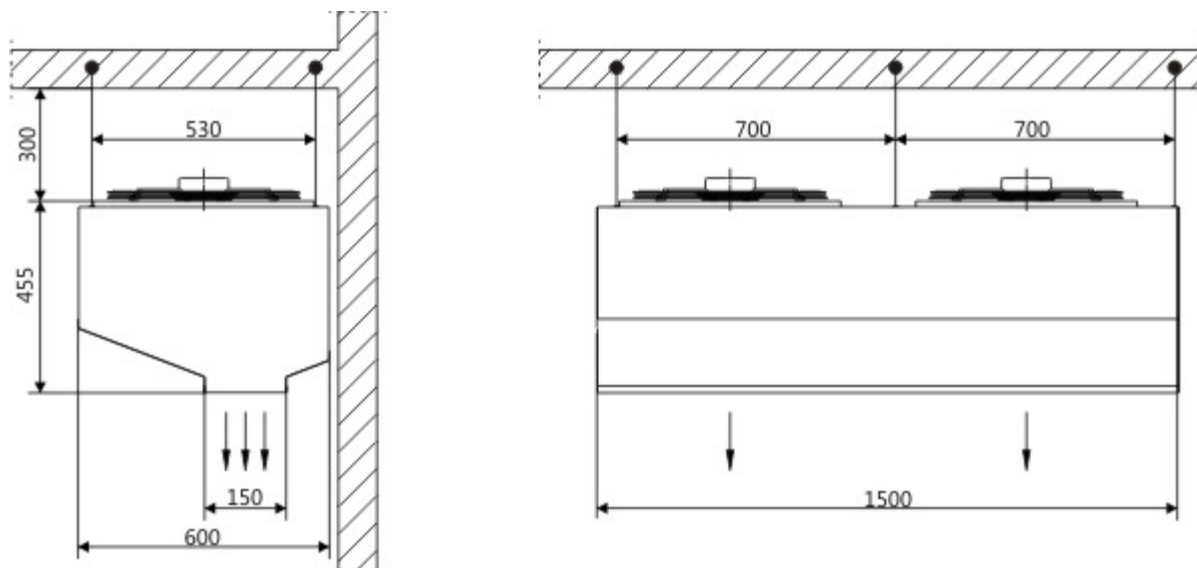


The parameters of the air curtain fans	
The number of fans	2
Voltage [V]	230
Motor power [kW]	0,18
Current [A]	0,82
Rotations per minute [min-1]	1380
Airflow efficiency [m <sup>3</sup> /h]	6500

Operating noise level of the air curtain [dB(A)]	
Sound level at a distance of 3 meters	60
Weight of the air curtain	
Mass [kg]	52

## KP/BN-1-150-W

### DIMENSIONS

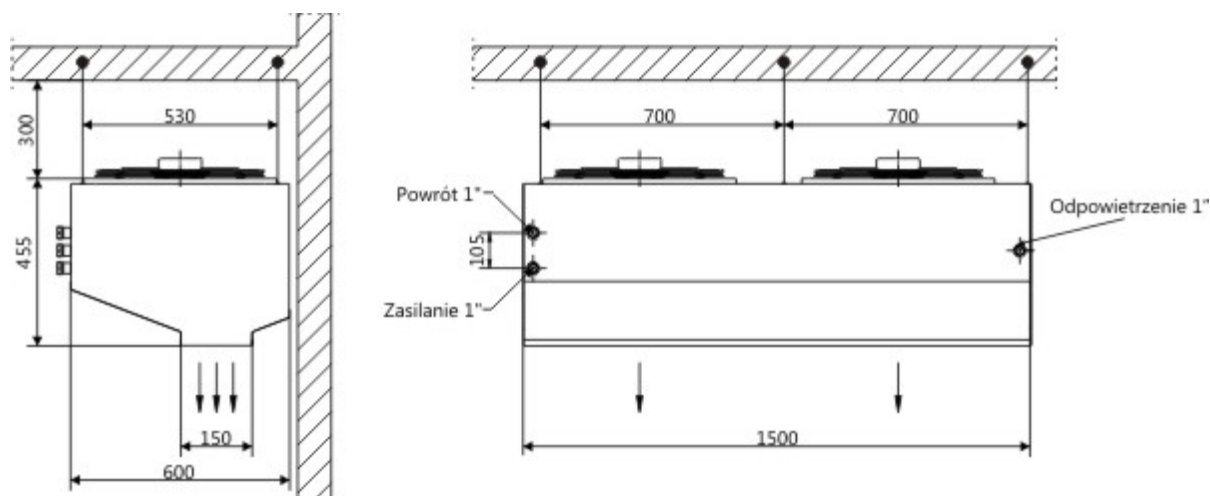

The parameters of the air curtain fans	
The number of fans	2
Voltage [V]	230
Motor power [kW]	0,18
Current [A]	0,82
Rotations per minute [min-1]	1380


Thermal capacities of the water-heated air curtain				
Airflow rate [m³/h]			6500	
Heat output [kW], outlet air temperature [°C] water flow resistance [kPa]				
Water parameters [°C]	Inlet air temperature. [°C]	kW	°C	kPa
90/70	5	40,6	22	1,2
	10	37,0	26	1,1
	15	33,5	30	1,1
80/60	5	33,7	19	1,0
	10	30,3	23	1,0
	15	26,9	27	0,9
70/50	5	27,1	16	0,9
	10	23,8	20	0,8
	15	20,6	24	0,8

<b>60/40</b>	<b>5</b>	20,7	14	0,8
	<b>10</b>	17,7	17	0,6
	<b>15</b>	14,7	21	0,6

<b>Operating noise level of the air curtain [dB(A)]</b>	
<b>Sound level at a distance of 3 meters</b>	60
<b>Weight of the air curtain</b>	
<b>Mass [kg]</b>	70

## KP/BN-1-200-z

### DIMENSIONS

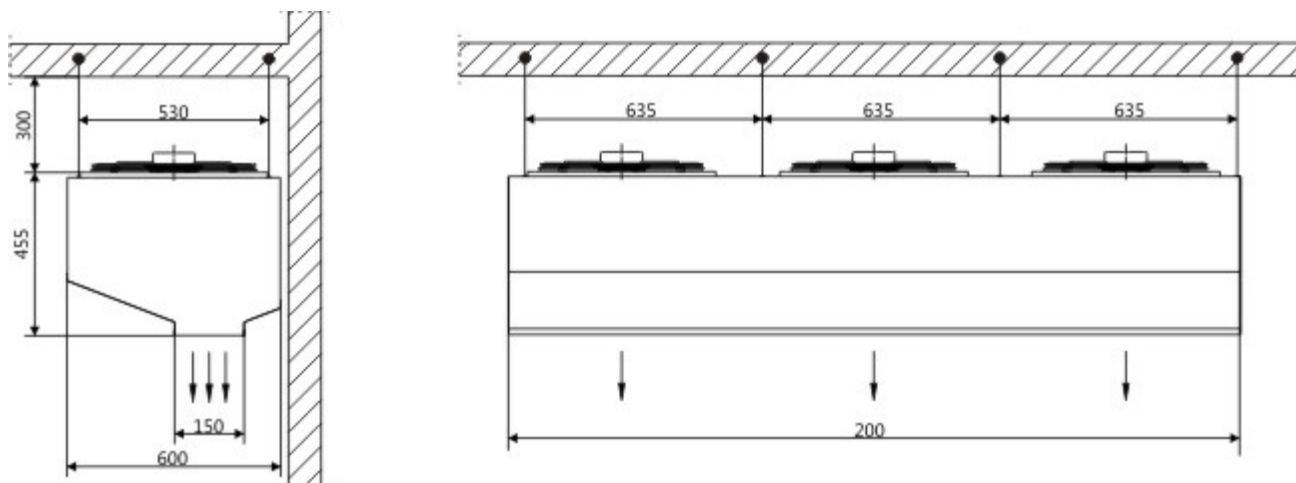


Parameters of the fans in the air curtain	
Number of fans	3
Voltage [V]	230
Motor power [kW]	0,18
Current [A]	0,82
Rotations per minute [min-1]	1380
Airflow efficiency [m <sup>3</sup> /h]	9750

Operating noise level of the air curtain [dB(A)]	
Sound level at a distance of 3 meters	60
Weight of the air curtain	
Mass [kg]	69

## KP/BN-1-200-W

### DIMENSIONS

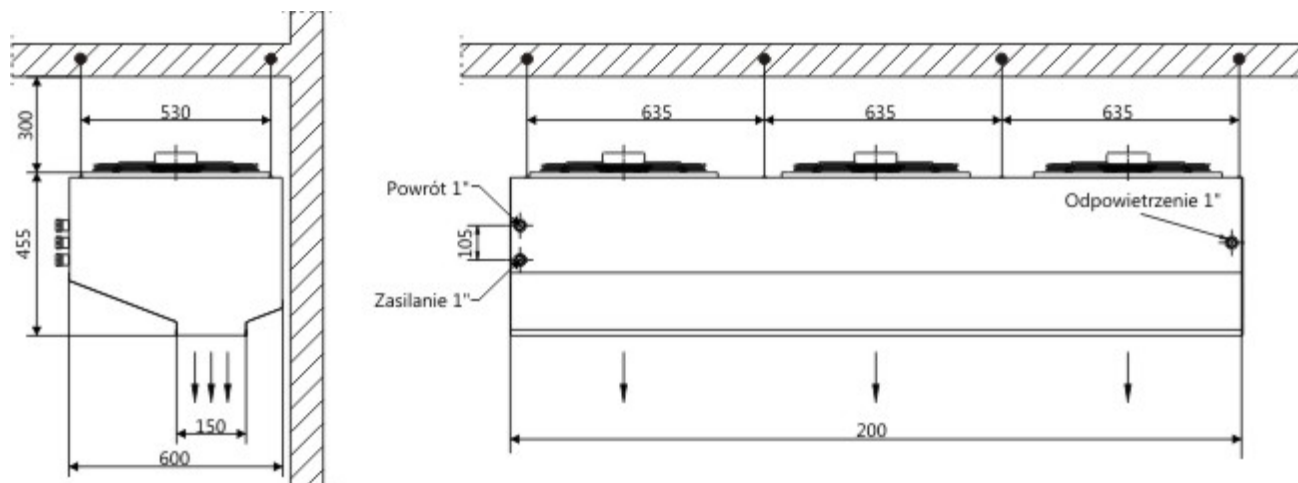

Parameters of the fans in the air curtain	
Number of fans	3
Voltage [V]	230
Motor power [kW]	0,18
Current [A]	0,82
Rotations per minute [min-1]	1380


Thermal capacities of the water-heated air curtain				
Airflow rate [m³/h]			9750	
Heat output [kW], outlet air temperature [°C] water flow resistance [kPa]				
Water parameters [°C]	Inlet air temperature [°C]	kW	°C	kPa
90/70	5	66,4	24	3,2
	10	60,3	27	2,8
	15	54,8	31	2,4
80/60	5	55,2	21	2,4
	10	49,3	24	2,0
	15	44,1	28	1,8
70/50	5	44,4	17	1,7
	10	39,0	21	1,3
	15	33,9	25	1,2

<b>60/40</b>	<b>5</b>	34,1	15	1,2
	<b>10</b>	29,0	18	1,1
	<b>15</b>	24,1	22	1,0

<b>Operating noise level of the air curtain [dB(A)]</b>	
<b>Sound level at a distance of 3 meters</b>	60
<b>Weight of the air curtain</b>	
<b>Mass [kg]</b>	91

## KP/BN-1-250-Z

### DIMENSIONS

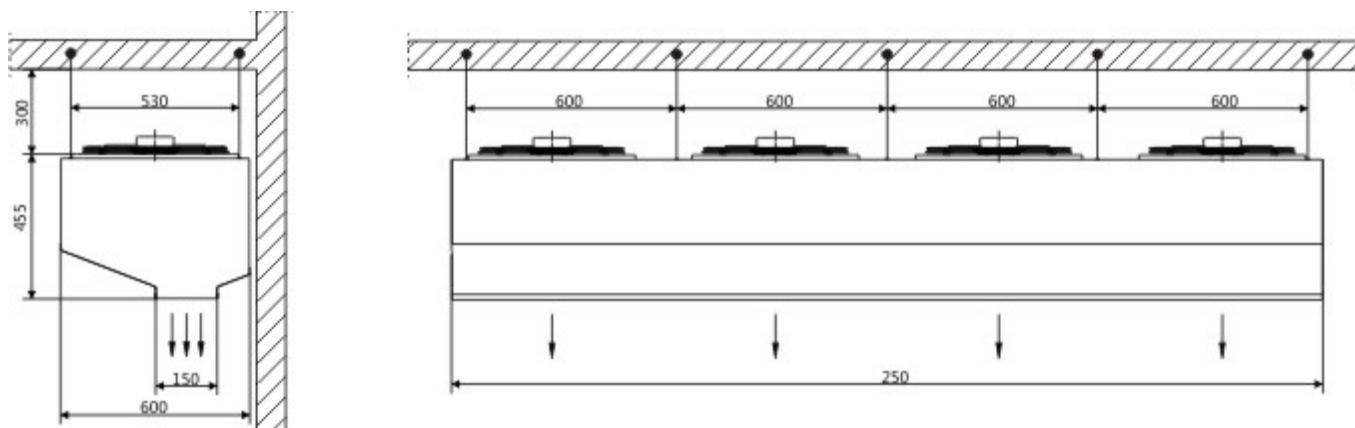


Parameters of the fans in the air curtain	
Number of fans	4
Voltage [V]	230
Motor power [kW]	0,18
Current [A]	0,82
Rotations per minute [min-1]	1380
Airflow efficiency [m <sup>3</sup> /h]	13000

Operating noise level of the air curtain [dB(A)]	
Sound level at a distance of 3 meters	60
Weight of the air curtain	
Mass [kg]	86



## KP/BN-1-250-W

### DIMENSIONS

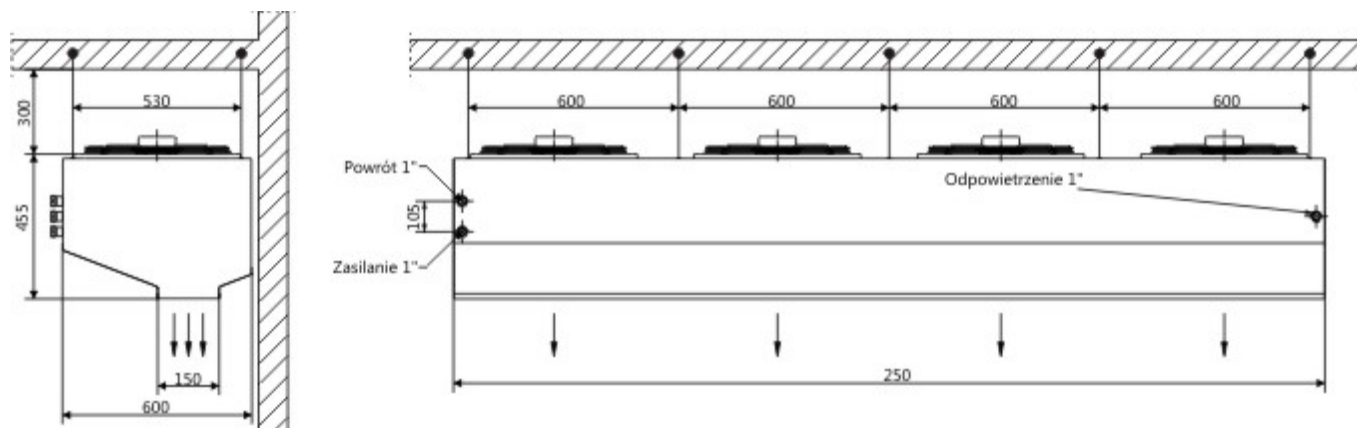


Parameters of the fans in the air curtain	
Number of fans	4
Voltage [V]	230
Motor power [kW]	0,18
Current [A]	0,82
Rotations per minute [min-1]	1380

Thermal capacities of the water-heated air curtain				
Airflow rate [m³/h]			13000	
Heat output [kW], outlet air temperature [°C] water flow resistance [kPa]				
Water parameters [°C]	Inlet air temperature [°C]	kW	°C	kPa
90/70	5	94,9	25	7,5
	10	86,6	29	6,8
	15	78,4	32	6,0
80/60	5	78,9	22	6,0
	10	70,9	25	4,4
	15	63,1	29	3,5
70/50	5	63,5	19	3,5
	10	55,9	22	3,0
	15	48,7	26	2,5
60/40	5	48,8	15	2,3
	10	41,6	19	1,8
	15	34,6	22	1,4

Operating noise level of the air curtain [dB(A)]	
Sound level at a distance of 3 meters	60
Weight of the air curtain	
Mass [kg]	114

## KP/BN-1-300-Z

### DIMENSIONS

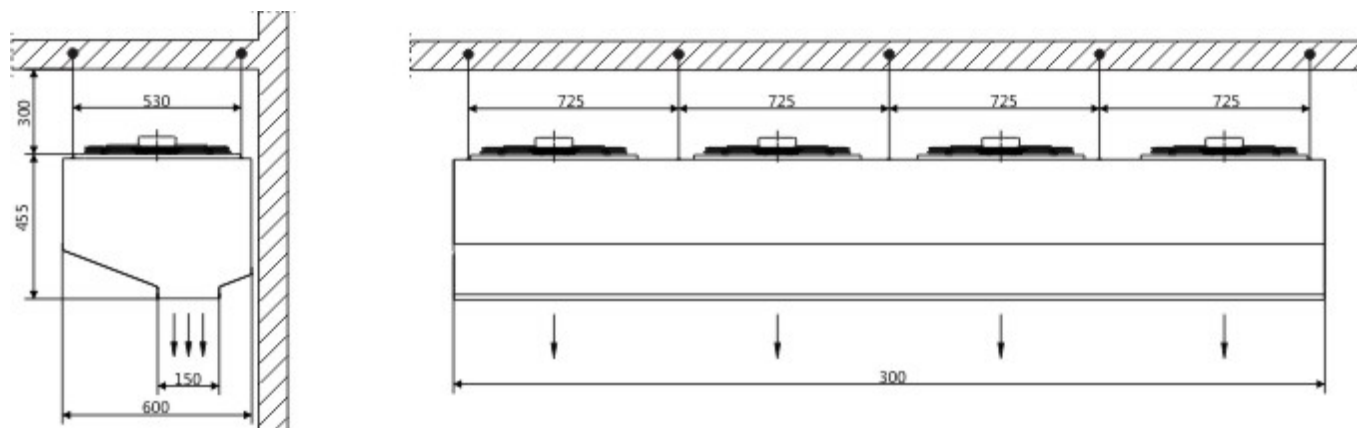


Parameters of the fans in the air curtain	
Number of fans	4
Voltage [V]	230
Motor power [kW]	0,18
Current [A]	0,82
Rotations per minute [min-1]	1380
Airflow efficiency [m <sup>3</sup> /h]	13000

Operating noise level of the air curtain [dB(A)]	
Sound level at a distance of 3 meters	60
Weight of the air curtain	
Mass [kg]	98

## KP/BN-1-300-W

### DIMENSIONS

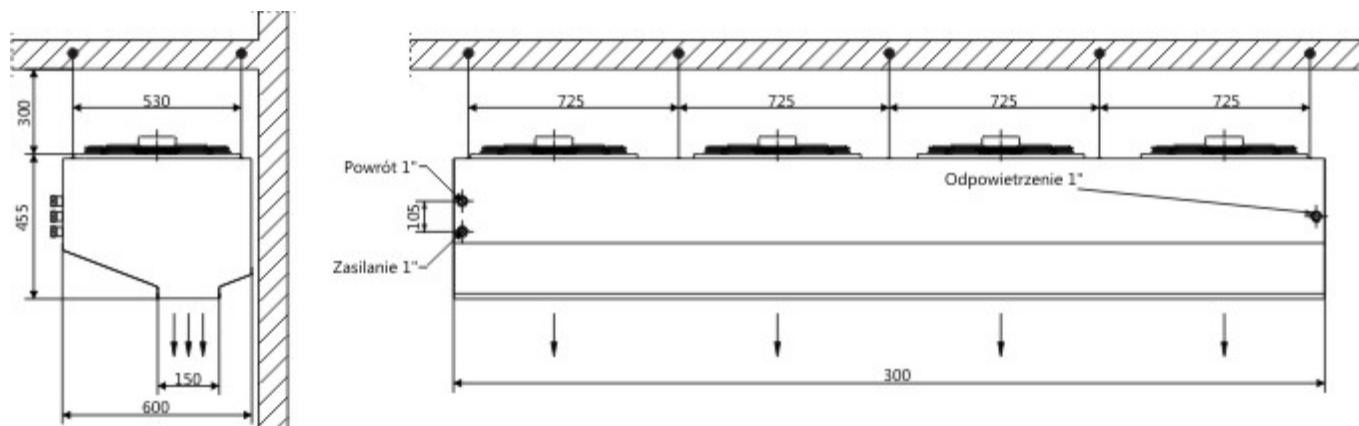

Parameters of the fans in the air curtain	
Number of fans	4
Voltage [V]	230
Motor power [kW]	0,18
Current [A]	0,82
Rotations per minute [min-1]	1380


Thermal capacities of the water-heated air curtain				
Airflow rate [m³/h]			13000	
Heat output [kW], outlet air temperature [°C] water flow resistance [kPa]				
Water parameters [°C]	Inlet air temperature [°C]	kW	°C	kPa
90/70	5	105,9	28	9,9
	10	96,6	31	8,8
	15	87,4	34	7,1
80/60	5	88,1	24	7,1
	10	79,2	27	5,8
	15	70,5	30	5,2
70/50	5	71,1	20	5,0
	10	62,6	23	4,4
	15	54,3	27	3,2

<b>60/40</b>	<b>5</b>	54,7	16	3,1
	<b>10</b>	46,6	20	2,5
	<b>15</b>	38,9	23	2,0

<b>Operating noise level of the air curtain [dB(A)]</b>	
<b>Sound level at a distance of 3 meters</b>	60
<b>Weight of the air curtain</b>	
<b>Mass [kg]</b>	131

## KP/BN-2-150-Z

### DIMENSIONS

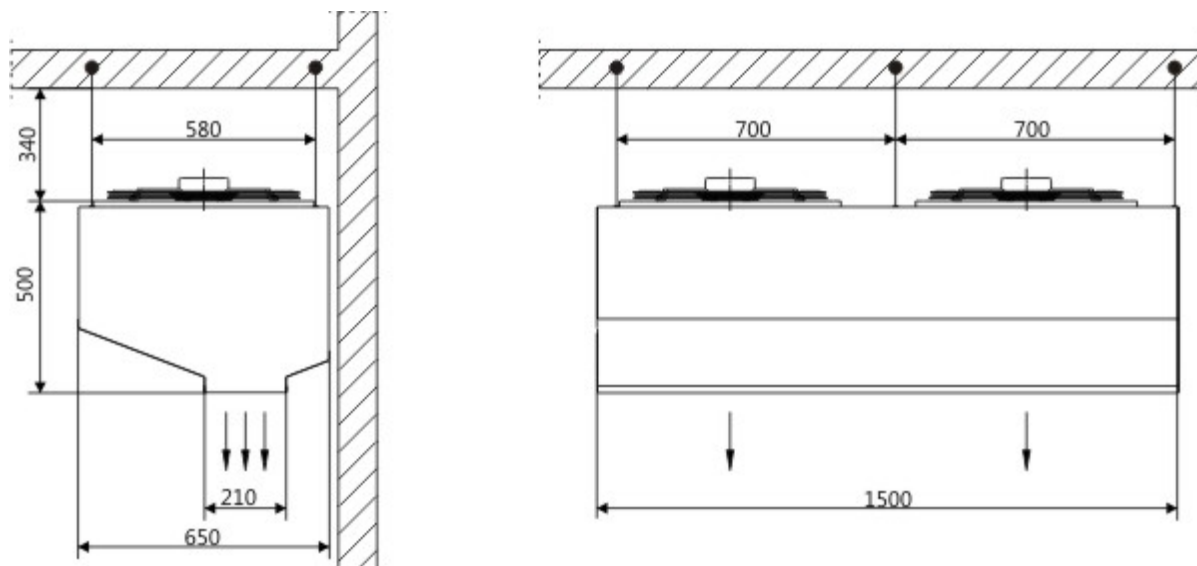

Parameters of the fans in the air curtain	
Number of fans	2
Voltage [V]	230
Motor power [kW]	0,25
Current [A]	1,2
Rotations per minute [min-1]	1380


Thermal capacities of the water-heated air curtain				
Airflow rate [m³/h]			9000	
Heat output [kW], outlet air temperature [°C] water flow resistance [kPa]				
Water parameters [°C]	Temp. powietrza napływ. [°C]	kW	°C	kPa
90/70	5	55,4	22	1,2
	10	50,6	26	1,1
	15	45,8	30	1,0
80/60	5	46,7	19	1,0
	10	41,4	23	0,9
	15	36,8	27	0,8
70/50	5	37,1	17	0,8
	10	32,5	20	0,7
	15	28,2	24	0,6

<b>60/40</b>	<b>5</b>	28,4	16	0,6
	<b>10</b>	24,1	18	0,7
	<b>15</b>	20,1	21	0,6

<b>Operating noise level of the air curtain [dB(A)]</b>	
<b>Sound level at a distance of 3 meters</b>	64
<b>Weight of the air curtain</b>	
<b>Mass [kg]</b>	79

## KP/BN-2-150-W

### DIMENSIONS

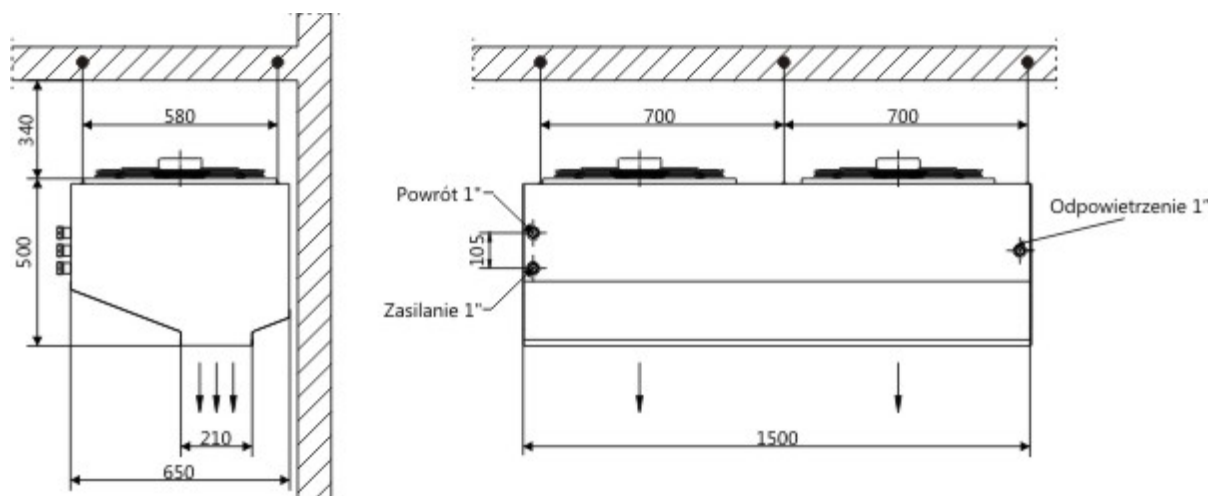

Parameters of the fans in the air curtain	
Number of fans	2
Napięcie [V]	230
Motor power [kW]	0,25
Current [A]	1,2
Rotations per minute [min-1]	1380


Thermal capacities of the water-heated air curtain				
Airflow rate [m³/h]			9000	
Moc cieplna [kW], temperatura powietrza wpływającego [°C] oraz opory przepływu wody [kPa]				
Water parameters [°C]	Inlet air temperature [°C]	kW	°C	kPa
90/70	5	55,4	22	1,2
	10	50,6	26	1,1
	15	45,8	30	1,0
80/60	5	46,7	19	1,0
	10	41,4	23	0,9
	15	36,8	27	0,8
70/50	5	37,1	17	0,8
	10	32,5	20	0,7
	15	28,2	24	0,6
60/40	5	28,4	16	0,6
	10	24,1	18	0,7
	15	20,1	21	0,6



Operating noise level of the air curtain [dB(A)]	
Sound level at a distance of 3 meters	64
Weight of the air curtain	
Mass [kg]	79

## KP/BN-2-200-z

### DIMENSIONS

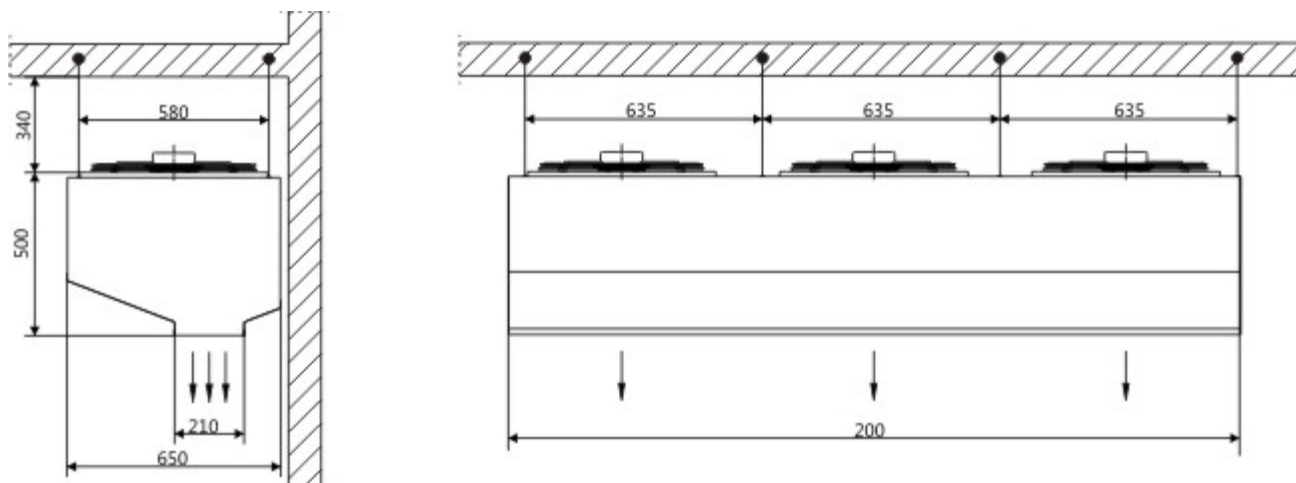


Parameters of the fans in the air curtain	
Number of fans	3
Voltage [V]	230
Motor power [kW]	0,25
Current [A]	1,2
Rotations per minute [min-1]	1380
Airflow efficiency [m <sup>3</sup> /h]	13500

Operating noise level of the air curtain [dB(A)]	
Sound level at a distance of 3 meters	64
Weight of the air curtain	
Mass [kg]	76

## KP/BN-2-200-W

### DIMENSIONS

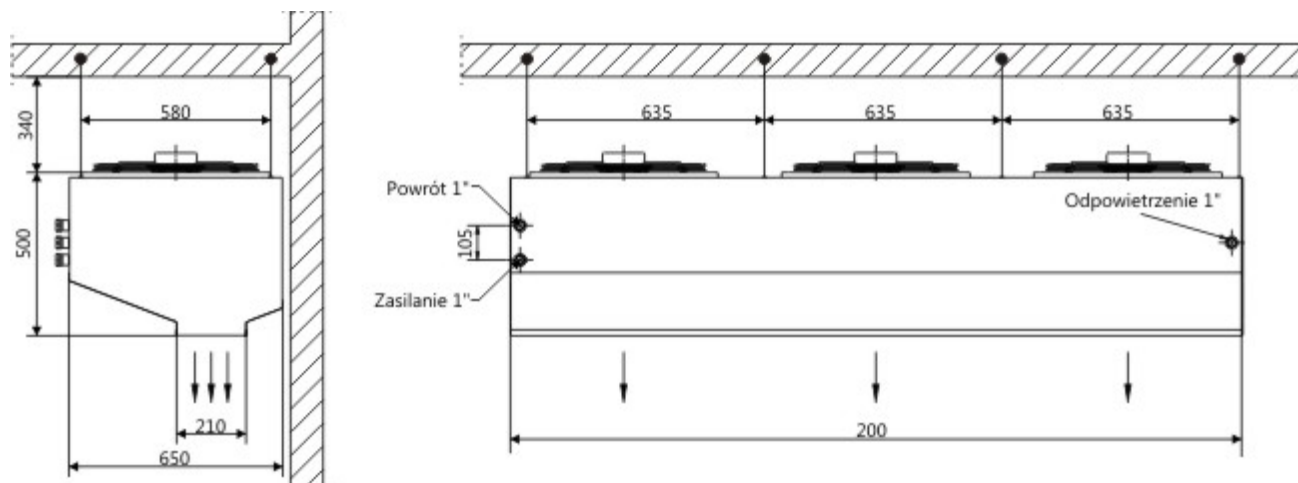

#### Parameters of the fans in the air curtain

Number of fans	3
Voltage [V]	230
Motor power [kW]	0,25
Current [A]	1,2
Rotations per minute [min-1]	1380


#### Thermal capacities of the water-heated air curtain

Airflow rate [m³/h]		13500		
Heat output [kW], outlet air temperature [°C] water flow resistance [kPa]				
Water parameters [°C]	Inlet air temperature [°C]	kW	°C	kPa
90/70	5	87,3	23	4,0
	10	79,6	27	3,5
	15	72,0	30	2,6
80/60	5	72,5	20	2,6
	10	65,2	24	2,2
	15	57,9	27	1,9
70/50	5	58,2	17	1,9
	10	21,2	21	1,6
	15	44,4	24	1,3
60/40	5	44,7	14	1,3
	10	38,1	18	1,0
	15	31,7	21	0,8

Operating noise level of the air curtain [dB(A)]	
Sound level at a distance of 3 meters	64
Weight of the air curtain	
Mass [kg]	104

## KP/BN-2-250-Z

### DIMENSIONS

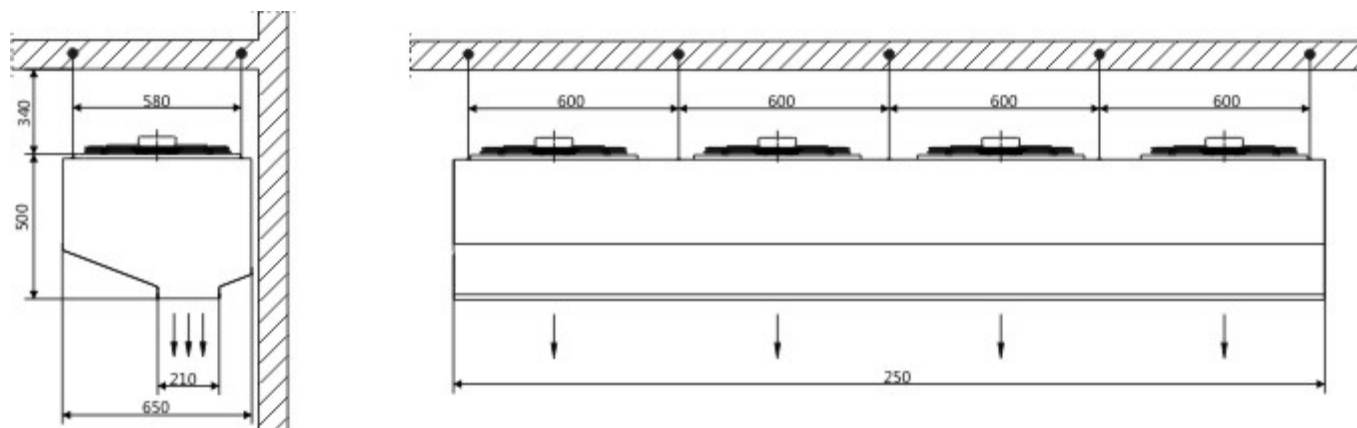


Parameters of the fans in the air curtain	
Number of fans	4
Voltage [V]	230
Motor power [kW]	0,25
Current [A]	1,2
Rotations per minute [min-1]	1380
Airflow efficiency [m <sup>3</sup> /h]	18000

Operating noise level of the air curtain [dB(A)]	
Sound level at a distance of 3 meters	64
Weight of the air curtain	
Mass [kg]	96

## KP/BN-2-250-W

### DIMENSIONS

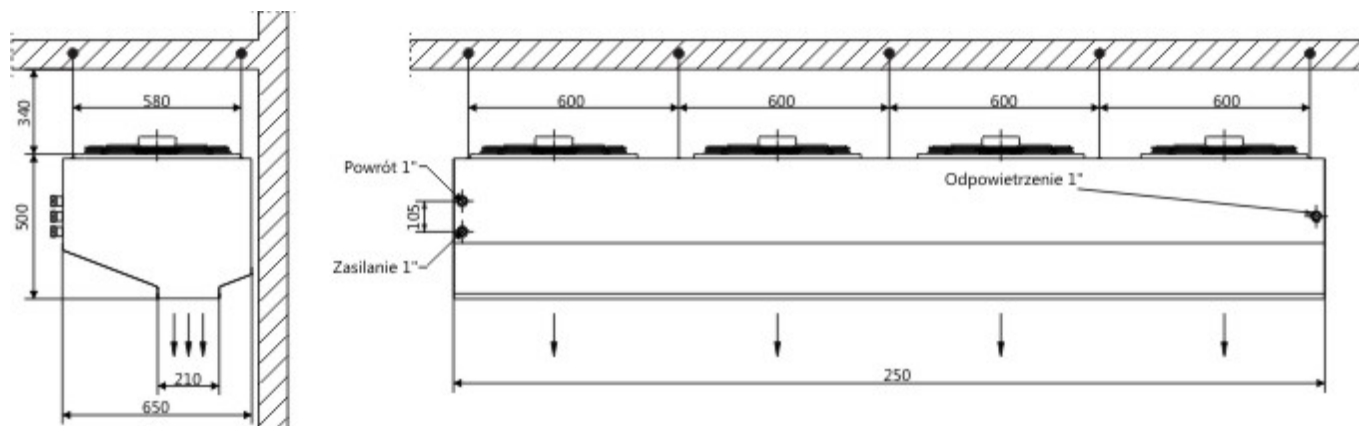


Parameters of the fans in the air curtain	
Number of fans	4
Voltage [V]	230
Motor power [kW]	0,25
Current [A]	1,2
Rotations per minute [min-1]	1380

Thermal capacities of the water-heated air curtain/strong>				
Airflow rate [m³/h]			18000	
Heat output [kW], outlet air temperature [°C] water flow resistance [kPa]				
Water parameters. [°C]	Inlet air temperature [°C]	kW	°C	kPa
90/70	5	110,9	23	7,7
	10	101,0	26	5,4
	15	91,4	30	5,5
80/60	5	92,0	19	5,5
	10	82,6	23	5,0
	15	73,5	27	3,7
70/50	5	73,9	16	3,7
	10	65,0	20	3,0
	15	56,3	24	2,5
60/40	5	56,6	14	2,5
	10	48,2	17	1,7
	15	40,1	21	1,3

Operating noise level of the air curtain [dB(A)]	
Sound level at a distance of 3 meters	64
Weight of the air curtain	
Mass [kg]	129

## KP/BN-2-300-Z

### DIMENSIONS

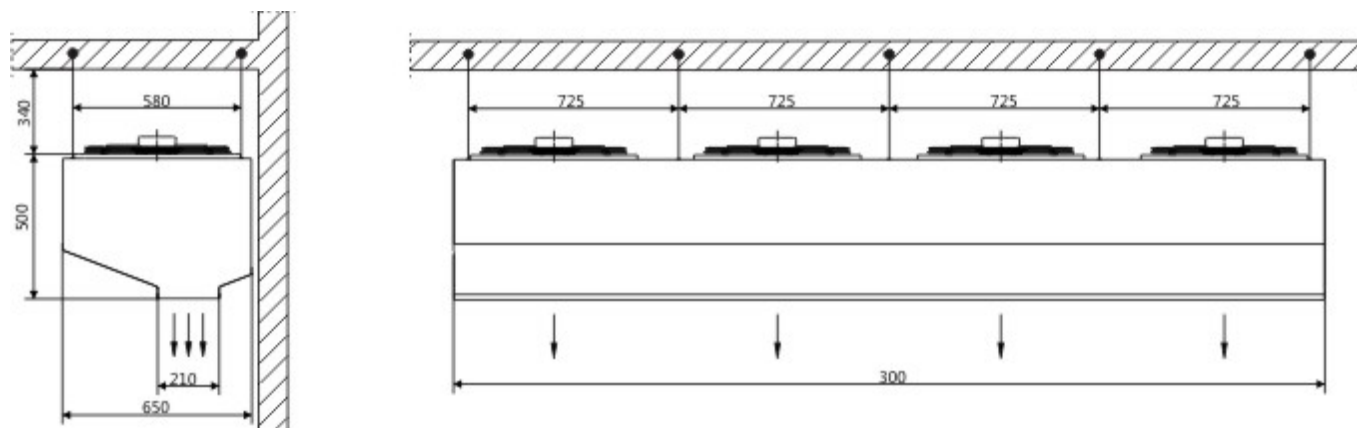


Parameters of the fans in the air curtain	
Number of fans	4
Voltage [V]	230
Motor power [kW]	0,25
Current [A]	1,2
Rotations per minute [min-1]	1380
Airflow efficiency [m <sup>3</sup> /h]	18000

Operating noise level of the air curtain [dB(A)]	
Sound level at a distance of 3 meters	64
Weight of the air curtain	
Mass [kg]	110



## KP/BN-2-300-W

### DIMENSIONS

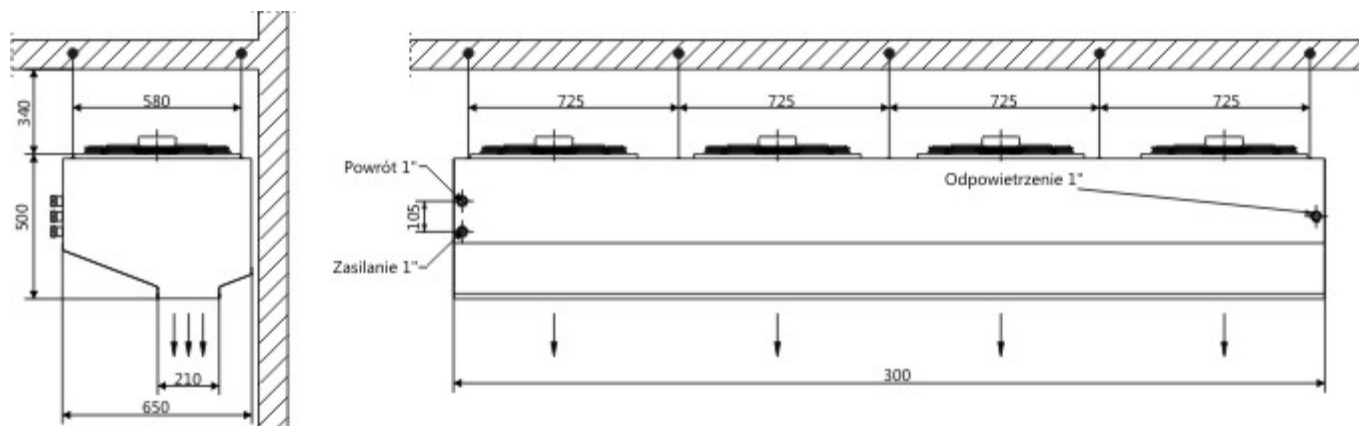

Parameters of the fans in the air curtain	
Number of fans	4
Voltage [V]	230
Motor power [kW]	0,25
Current [A]	1,2
Rotations per minute [min-1]	1380

Thermal capacities of the water-heated air curtain				
Airflow rate [m³/h]			18000	
Heat output [kW], outlet air temperature [°C] water flow resistance [kPa]				
Water parameters [°C]	Inlet air temperature [°C]	kW	°C	kPa
90/70	5	124,7	25	10,0
	10	113,7	28	8,8
	15	102,9	31	6,2
80/60	5	103,6	21	6,2
	10	93,1	25	5,6
	15	82,8	28	4,6
70/50	5	83,3	18	4,6
	10	73,3	21	3,4
	15	63,6	25	2,9
60/40	5	63,9	15	2,9
	10	54,5	18	2,1
	15	45,3	22	1,5

Operating noise level of the air curtain [dB(A)]	
Sound level at a distance of 3 meters	64
Weight of the air curtain	
Mass [kg].	148